
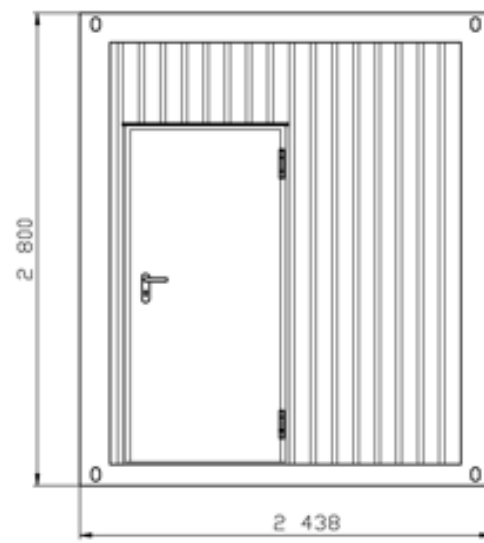
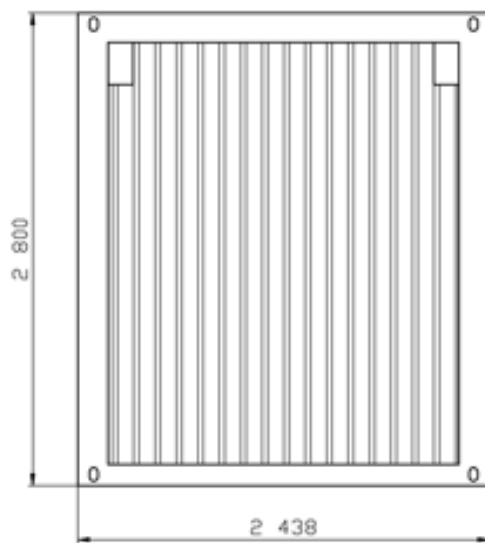
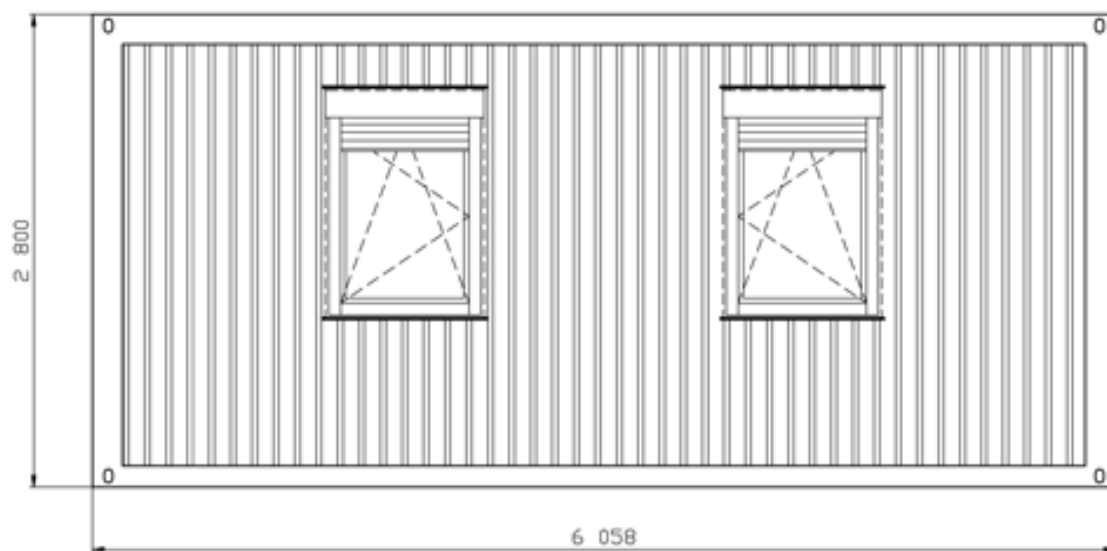



IM 04 - Standard Line

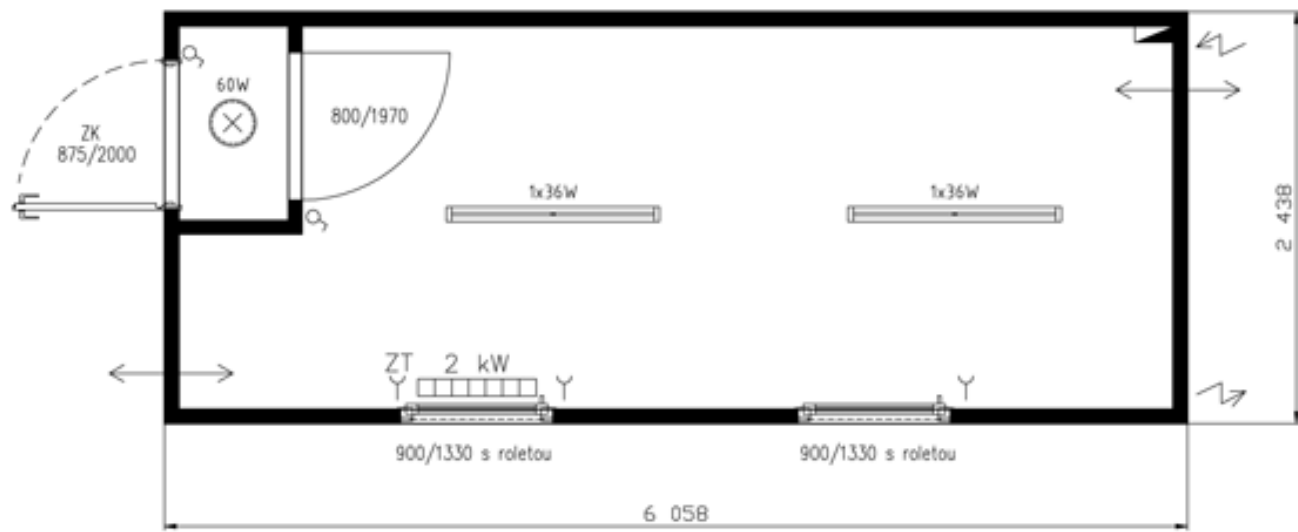

	typ	IM 04
	izolace	80-60-80

Roofing galvanized profiled sheet 0,75mm , wave depth 35mm

Insulation mineral wool 80 mm

Heat transfer coefficient U=0,527 W/m²K (80mm)

Vapour barrier PE film 0,11 mm

Inside panelling bouth sides laminated chipboard 10mm, white

Roof drainage 4 plastic leads ø60 mm

Floor loading 150 kg/m²

Wall

Outside panelling galvanized profiled sheet 0,55mm , wave depth 10mm

Surface finish light and weather resistant two-component paint in RAL Tone acc.to choice

Insulation mineral wool 60 mm

Heat transfer coefficient U=0,632 W/m²K (60 mm)

Vapour barrier PE film 0,11 mm

Inside panelling bouth sides laminated chipboard 10mm, white

Floor

Construction steel construction, transverse floor beams, floor sheet 0,55mm

Insulation mineral wool 80 mm

Heat transfer

coefficient U=0,560 W/m²K (80 mm)

Floor chipboard 22 mm/ Cetris 20 mm

Flooring PVC1,5mm, grey

Floor loading 250 kg/m²

Vapour barrier PE film 0,11 mm

Wiring

Norm ČSN or VDE

Inlet - Outlet 400V/32A

Light 2× flourescent light 1×36W with covering, 1x light 60W

3× socket,

1× switch,

Accessories 1× el.heating 2 kW with thermostat

Switchboard 1× 10A, 2× 16A, FI- circuit braker

Equipment

Doors 1× steel door, galvanized 875/2000mm, rubber seal, cylindrycal lock, painted in container´s tone 1x internal door 800/1970 mm, white

Windows 1× plastic windows 900/1330mm, 1 wing, hingeopened, incl. PVC blind, white
