
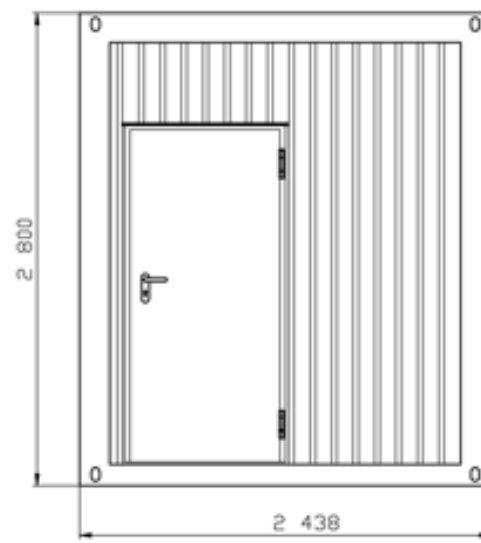
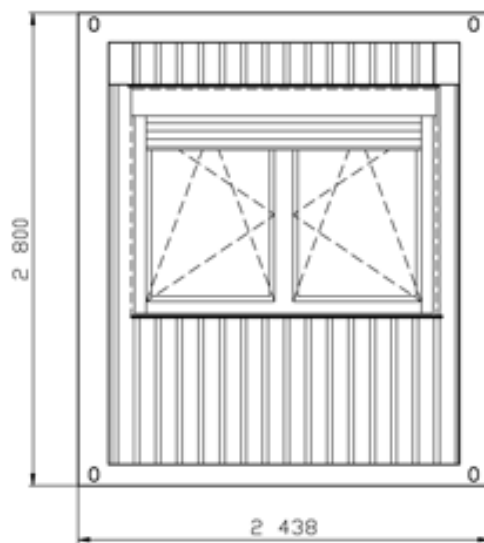
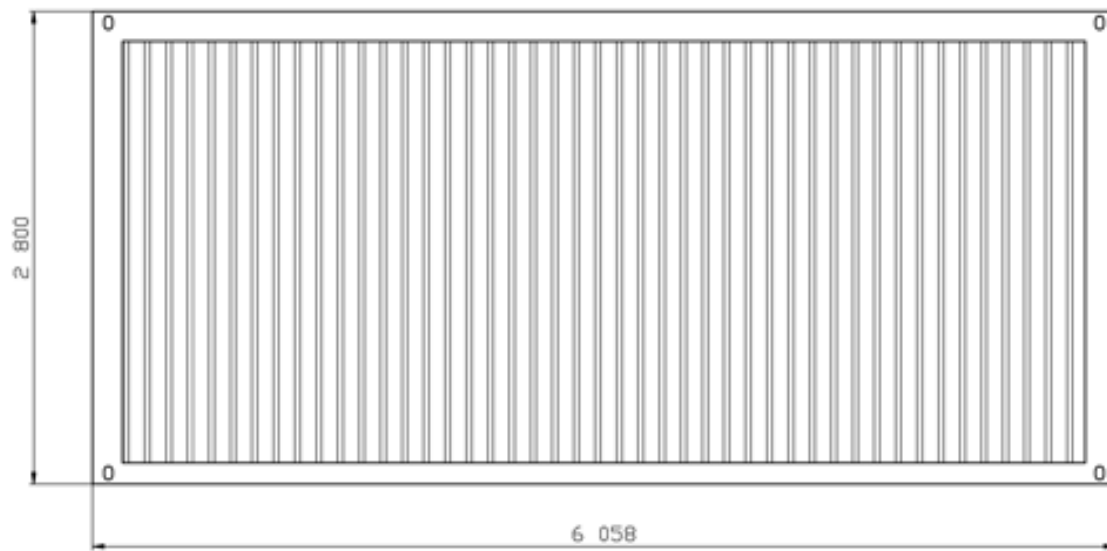



# IM 05 - Standard Line

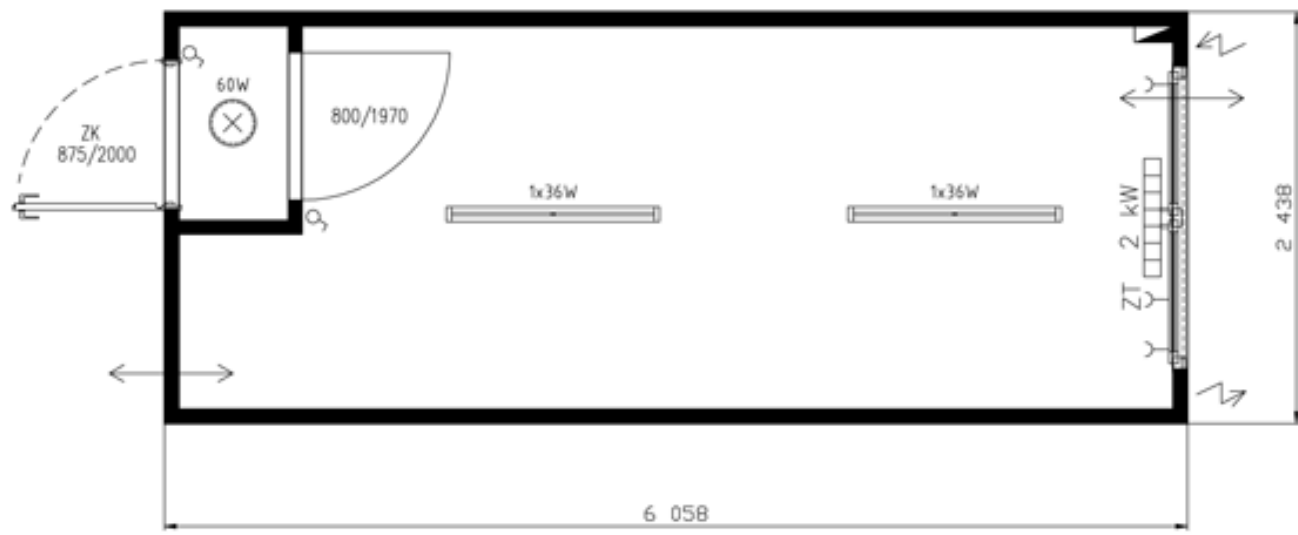

	typ	IM 05
	izolace	80-60-80

Roof

**Roofing** galvanized profiled sheet 0,75mm , wave depth 35mm

---

**Insulation** mineral wool 80 mm

---

**Heating transfer coefficient** U=0,527 W/m<sup>2</sup>K (80 mm)

---

**Vapour barrier** PE film 0,11 mm

---

**Inside panelling** bouth sides laminated chipboard 10mm, white

---

**Roof drainage** 4 plastic leads ø60 mm

---

**Floor loading** 150 kg/m<sup>2</sup>

---

## Wall

---

**Outside panelling** galvanized profiled sheet 0,55mm , wave depth 10mm

---

**Surface finish** light and weather resistant two-component paint in RAL Tone acc.to choice

---

**Insulation** mineral wool 60 mm

---

**Heating transfer coefficient** U=0,632 W/m<sup>2</sup>K (60 mm)

---

**Vapour barrier** PE film 0,11 mm

---

**Inside panelling** bouth sides laminated chipboard 10mm, white

---

## Floor

---

**Construction** steel construction, transverse floor beams, floor sheet 0,55mm

---

**Insulation** mineral wool 80 mm

---

**Heating transfer coefficient** U=0,560 W/m<sup>2</sup>K (80 mm)

---

<b>Floor</b>	chipboard 22 mm / Cetris 20 mm
<b>Flooring</b>	PVC 1,5 mm, grey
<b>Floor loading</b>	250 kg/m <sup>2</sup>
<b>Vapour barrier</b>	PE film 0,11 mm

---

## Wiring

---

<b>Norm</b>	ČSN or VDE
<b>Inlet - Outlet</b>	400V/32A
<b>Light</b>	2× flourescent light 1×36W with covering, 1x light 60W
<b>Accessories</b>	3× socket, 1× switch, 1× el.heating 2 kW with termostat
<b>Switchboard</b>	1× 10A, 2× 16A, FI- circuit braker

---

## Equipment

---

<b>Doors</b>	1× metal door, galvanized 875/2000mm, rubber seal, cylindrical lock, painted in container ’s tone 1x internal door 800/1970 mm, white 1x internal door 600/1970 mm, white
<b>Windows</b>	1× plastic windows 1768/1330mm, 2 wings, hingeg-opened, incl. PVC blind, white, incl.blind 1x plastic window, 600/450 mm, hinged-opened
<b>Sanitary</b>	1x WC, 1x wash basin - cold water

---